

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
16 December 2004 (16.12.2004)

PCT

(10) International Publication Number
WO 2004/109271 A1

(51) International Patent Classification⁷: G01N 27/447

(21) International Application Number:
PCT/GB2004/002423

(22) International Filing Date: 8 June 2004 (08.06.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0313197.6 9 June 2003 (09.06.2003) GB

(71) Applicant (for all designated States except US): IM-
PERIAL COLLEGE INNOVATIONS LIMITED
[GB/GB]; Sherfield Building, Exhibition Road, London
SW7 2AZ (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): MANZ, Andreas


[DE/DE]; ISAS-Institute for Analytical Sciences, Bun-
sen-Kirchhoff-Str.11, D-44139 Dortmund (DE). ZHANG,
Chao-Xuan, Dr [CN/GB]; Department of Chemistry,
Imperial College London, Sherfield Building, London
SW7 2AZ (GB).

(74) Agent: BODEN, Keith, McMurray, Dr; Fry Heath &
Spence LLP, The Gables, Massetts Road, Horley, Surrey
RH6 7DQ (GB).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

[Continued on next page]

(54) Title: FREE FLOW ELECTROPHORESIS MICROCHIP, SYSTEM AND METHOD

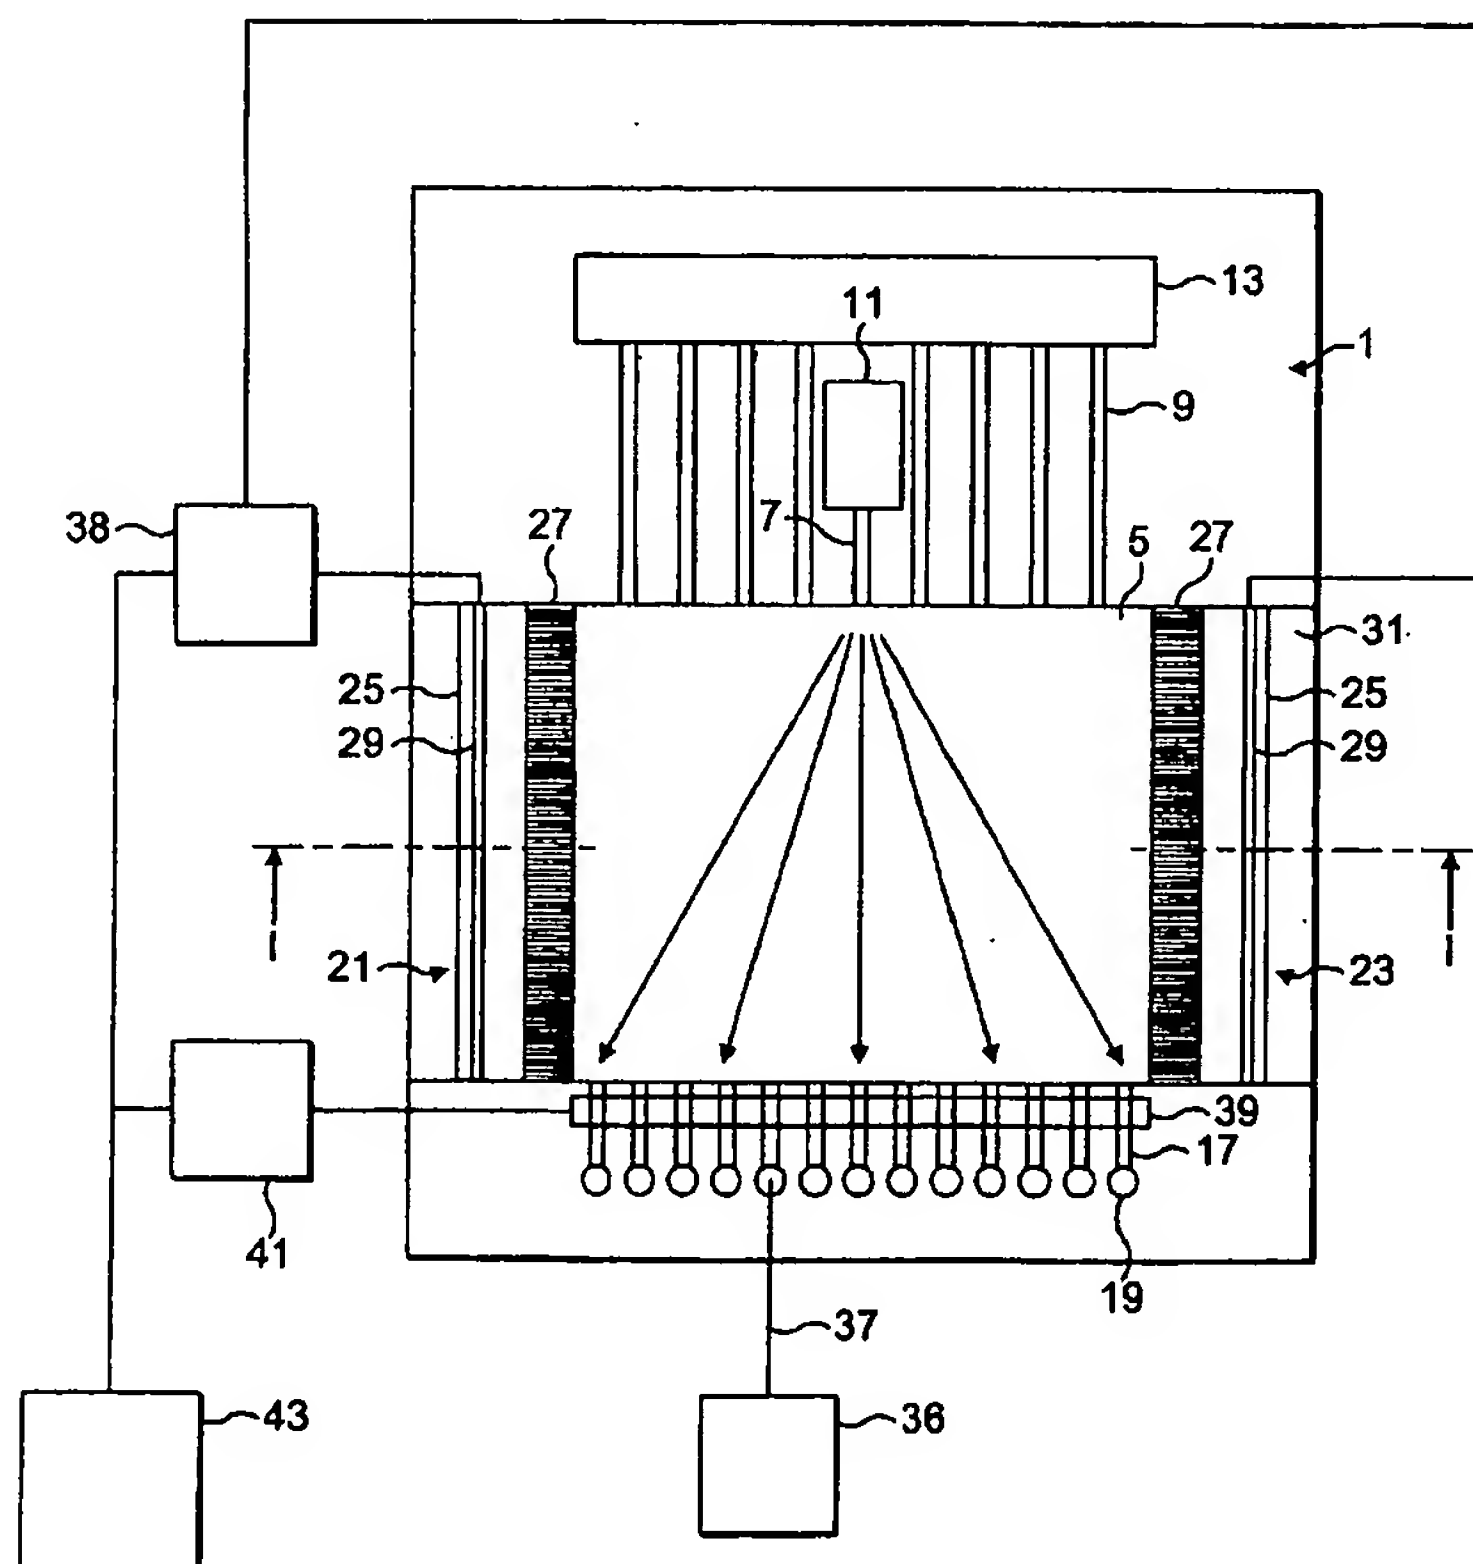

(57) Abstract: Device and method for free flow electrophoresis having a microchip (1) comprising: a separation chamber (5); a plurality of separation medium inlet channels (9), a sample inlet side of the separation chamber through which a flow of a sample containing charged components is introduced into the separation chamber; a plurality of outlet channels (17) having inlets fluidly connected to another, outlet side of the separation chamber opposite the inlet side thereof, and a magnetic field unit (31) for providing a magnetic field substantially orthogonal to the flow direction of the separation medium; whereby charged components introduced into the separation chamber are deflected laterally across the separation chamber in dependence upon the charge, typically the electrophoretic mobilities or the iso-electric points, of the charged components.